Quick-Lift Rail

QL R 125i


Intelligent lifting device which meets the highest standards of ergonomics, working environment, safety and efficiency.

Easy to use, thanks to outstanding responsiveness, regardless of load weight.

Exceptional safety is achieved using our intelligent control systems.

The best auto balancing available, regardless of load weight.


High cost efficiency through low power consumption, high reliability and long durability.

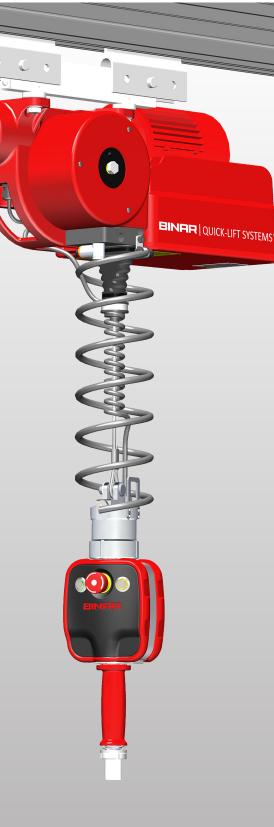





## Quick-Lift Rail

## QL R 125i

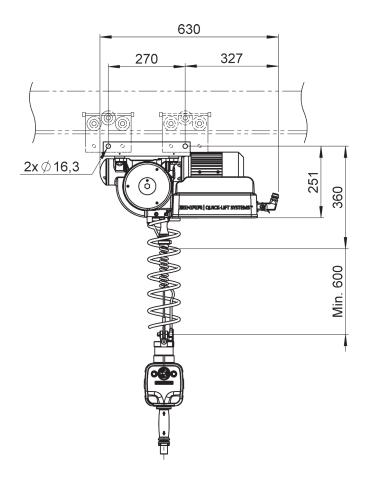

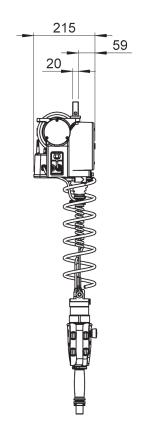



TECHNICAL DATA QL R 125i	
Lifting capacity	Max 125 kg
Lift motor	Stepless servo-controlled asynchronous motor
Weight	28 kg
Manoeuvring	Manoeuvring is done by using a patented manoeuvring handle or balancing mode. Both options sense the operator's hand/arm movement and give a very exact and smooth speed control.
	Only a force equivalent to 20 gram is needed to engage the up/down motion. When the operator let go of the handle or object, the up/down motion is immediately stopped.
Power supply	230V, 50-60 Hz, 1-phase with ground protection, 10A
Stroke length	2,7 meter
Suspension	The QL R 125i can be mounted in the most types of rail systems. Existing rail systems can often be used.
Gripping device	Grippers are designed to fit customer's need. Intelligent I/O signals are available for optimum functionality. Easy accessible USB communication as standard.

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

## **KUNDEL** Industries

1510 Ridge Road • Vienna OH 44473 • US ph +1 (330) 259-9009 • fax +1 (330) 259-9001 sales@quickliftsystems.com • www.quickliftsystems.com

